



- ◆ DIP Switch configuration option provides more setup flexibility
- ◆ A faster processor with more memory makes it possible to accept more bills than ever

- ◆ Dual-stage optical anti-stringing
- ◆ Simple setup with Configuration Card, PC or DIP Switch
- ◆ 12VDC standard, optional 120VAC internal supply
- ◆ Lighted arrows on bezel and bill entry area
- ◆ High security against fraudulent bills
- ◆ Flash-update firmware with PC or PRO-1 handheld
- ◆ Pushbutton / LED on-board diagnostics
- ◆ PC-based advanced diagnostics
- ◆ Numerous interfaces available - pinouts compatible with other manufacturers
- ◆ Bills up to 72mm wide accepted
- ◆ Automatic self-calibration - never requires user calibration
- ◆ Optional 500-Bill Locking Cashbox



1718 North Quail
Mesa, AZ 85205 USA
Tel: 480.507.0088
Fax: 480.507.1922



PYRAMID
TECHNOLOGIES, INC.

www.pyramidacceptors.com



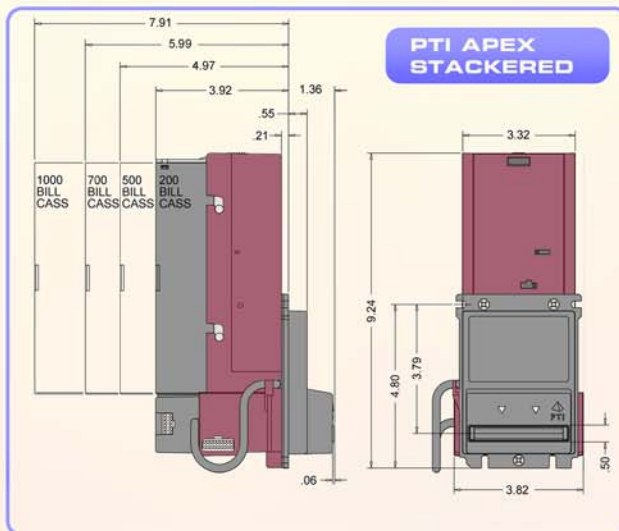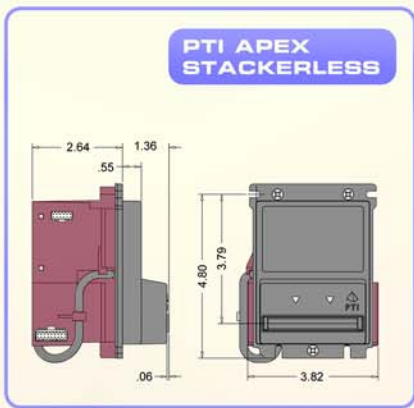

MODEL NUMBER SELECTION

TYPE
 U - Upstacker
 D - Downstacker
 S - Stackerless

CASHBOX
 N - None (Stackerless)
 2 - 200 Bill Cassette
 5 - 500 Bill Cassette
 7 - 700 Bill Cassette
 1 - 1000 Bill Cassette
 D - Lockable 500 Bill

COUNTRY CODE
 ISO 3-character country code
 Example: USA for United States

APEX - 7X00 - X X X - XXX

MODEL
 7200 - No Mag. Head (\$1 - \$5 USA)
 7400 - No Mag. Head (\$1 - \$20 for USA)
 7600 - With Mag. Head (\$1 - \$100 USA)

POWER SUPPLY / COMMUNICATIONS
 1 - 12 VDC
 2 - Standard 120VAC supply
 3 - Optional high-level 120VAC supply
 4 - MDB Option
 5 - True RS-232 Option, 12VDC operation
 9 - 24 VAC

APEX SPECIFICATIONS

- OPERATING VOLTAGE:** 12VDC standard, 120VAC supply optional.
- OPERATING CURRENT:** 180mA idle; 500mA operating; 1.50A stalled.
- OPERATING TEMP.:** 0C to 60C, 90% non-condensing humidity.
- ACCEPTANCE RATE:** Greater than 95% (including second-time insertion of a rejected bill).
- ACCEPTANCE SPEED:** Approx. 20 bills per minute.
- SENSOR ARRAY:** (8) Optical Sensors; (1) Magnetic Head standard on \$50, \$100 version.
- NET WEIGHT:** Stackered: 2.3 lbs / 1.04 kg.
- WARRANTY:** 2 years, parts and labor.